

DINOLift
Up to the Job



DINO® TRAILERS

DINO T/B Series

- Working heights 12.0 – 23.0 m
- Telescopic boom – large outreach
- Simple and reliable

Trailer mounted T/B series

Standard features in all DINO T/B -models:

- Lightweight, robust, cost-effective
- Driving system; easy to move at work site (picture 1)
- Spacious, easy-entry basket; capacity 215 kg *(picture 2)
- Large outrigger plates 280 x 360 mm (picture 3)
- Continuous rotation of the boom; easy and functional
- Basket rotation 90° *
- Proportional controls*
- Stable to tow
- Easy and fast setup; perfect solution for short time jobs
- Simple to use, clear and informative controls (pictures 4 and 5)
- Powerful charger; machine can be operated directly when charging the batteries. (TB series)
- High-capacity batteries, 4 x 6VDC, 235Ah. Work one day with overnight charge. (TB series)

*) except in 120T/B



Options for all DINO T/B-models


- Petrol power pack (T series)*
*) standard in 230T
- Cable steering for driving (picture 6)
- Outrigger support indicator (picture 7)
- LED working lights
- Extra outrigger plates, 500 x 500 x 35 mm + bracket
- Lockable tool / harness box (picture 8)
- 2kW Honda generator + bracket for charging batteries where 230VAC is not available (TB series) (picture 9)
- Rack for tools and accessories
- Spare wheel



DINO 120T/B

- 1-person steel basket
- Full outreach with maximum basket capacity

Technical data

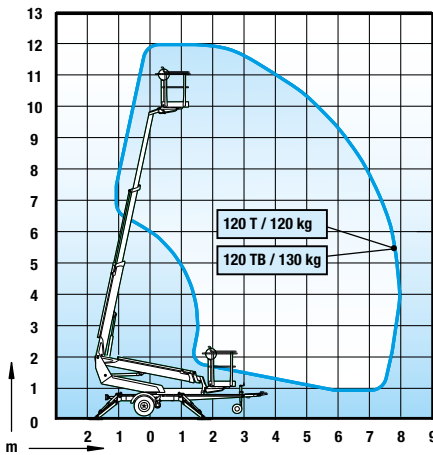


| | 120T | 120TB |
|-----------------------------|---------------|---------------|
| Max. working height | 12.00 m | 12.00 m |
| Max. platform height | 10.00 m | 10.00 m |
| Max. outreach | 7.90 m | 7.90 m |
| Support width | 3.15 / 3.55 m | 3.15 / 3.55 m |
| Lifting capacity | 120 kg | 130 kg |
| Basket size | 0.75 x 0.80 m | 0.75 x 0.80 m |
| Boom rotation | cont. | cont. |
| Boom control | 2-speed | 2-speed |
| Transport length | 5.52 m | 5.52 m |
| Transport width | 1.72 m | 1.72 m |
| Transport height | 1.96 m | 1.96 m |
| Weight | 1285 kg | 1390 kg |
| Driving system | std | std |
| AC socket in the basket x 2 | std | std |
| Electro motor | std | - |
| Petrol power pack | opt. | - |
| Batteries 140 Ah | - | std |
| DC Motor | - | std |
| Gradeability | 25 % | 25 % |



DINO 135T/B

Technical data

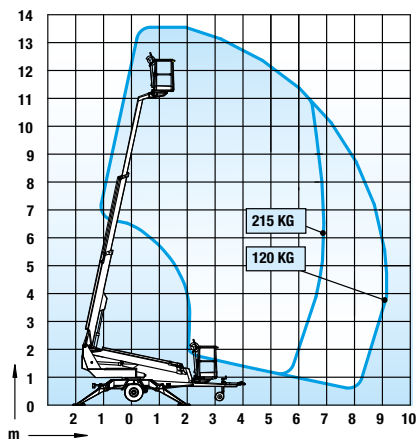


| | 135T | 135TB |
|-----------------------------|-------------|-------------|
| Max. working height | 13.50 m | 13.50 m |
| Max. platform height | 11.50 m | 11.50 m |
| Max. outreach | 9.10 m | 9.10 m |
| Support width | 3.8 / 4.2 m | 3.8 / 4.2 m |
| Lifting capacity | 215 kg | 215 kg |
| Basket size | 0.7 x 1.3 m | 0.7 x 1.3 m |
| Boom rotation | cont. | cont. |
| Basket rotation | 90 ° | 90 ° |
| Boom control | proport. | proport. |
| Transport length | 5.96 m | 5.93 m |
| Transport width | 1.78 m | 1.78 m |
| Transport height | 2.16 m | 2.16 m |
| Weight | 1635 kg | 1765 kg |
| Driving system | std | std |
| AC socket in the basket x 2 | std | std |
| Electro motor | std | - |
| Petrol power pack | opt. | - |
| Batteries 235 Ah | - | std |
| DC Motor | - | std |
| Gradeability | 25 % | 25 % |



DINO 150T/B

Technical data

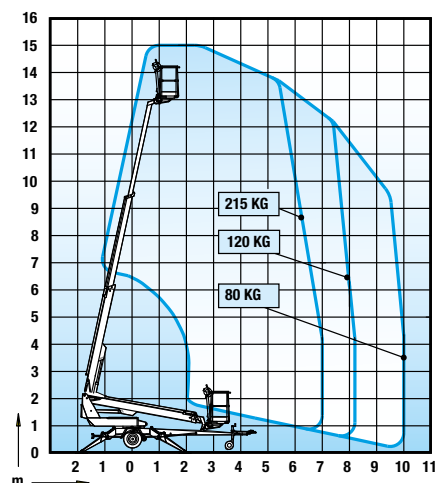


| | 150T | 150TB |
|-----------------------------|-------------|-------------|
| Max. working height | 15.00 m | 15.00 m |
| Max. platform height | 13.00 m | 13.00 m |
| Max. outreach | 10.00 m | 10.00 m |
| Support width | 3.8 / 4.2 m | 3.8 / 4.2 m |
| Lifting capacity | 215 kg | 215 kg |
| Basket size | 0.7 x 1.3 m | 0.7 x 1.3 m |
| Boom rotation | cont. | cont. |
| Basket rotation | 90 ° | 90 ° |
| Boom control | proport. | proport. |
| Transport length | 6.53 m | 6.50 m |
| Transport width | 1.78 m | 1.78 m |
| Transport height | 2.24 m | 2.24 m |
| Weight | 1675 kg | 1835 kg |
| Driving system | std | std |
| AC socket in the basket x 2 | std | std |
| Electro motor | std | - |
| Petrol power pack | opt. | - |
| Batteries 235 Ah | - | std |
| DC Motor | - | std |
| Gradeability | 25 % | 25 % |



DINO 180T/B

Technical data

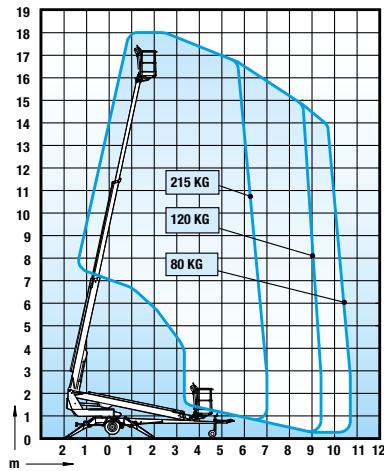


| | 180T | 180TB |
|-----------------------------|-------------|--------------|
| Max. working height | 18.00 m | 18.00 m |
| Max. platform height | 16.00 m | 16.00 m |
| Max. outreach | 10.70 m | 10.70 m |
| Support width | 3.8 / 4.2 m | 3.8 / 4.2 m |
| Lifting capacity | 215 kg | 215 kg |
| Basket size | 0.7 x 1.3 m | 0.7 x 1.3 m |
| Boom rotation | cont. | cont. |
| Basket rotation | 90 ° | 90 ° |
| Boom control | proport. | proport. |
| Transport length | 7.46 m | 7.42 m |
| Transport width | 1.78 m | 1.78 m |
| Transport height | 2.19 m | 2.19 m |
| Weight | 1840 kg | 1945 kg |
| Driving system | std | std |
| AC socket in the basket x 2 | std | std |
| Electro motor | std | - |
| Petrol power pack | opt. | - |
| Batteries 235 Ah | - | std |
| DC Motor | - | std |
| Gradeability | 25 % | 25 % |



DINO 230T

- **Generator as standard; providing a power source for both the platform and tools**
- **Spider outriggers; great leveling capability in slopy terrain**
- **Robust boom; stable movements and large outreach**

Technical data

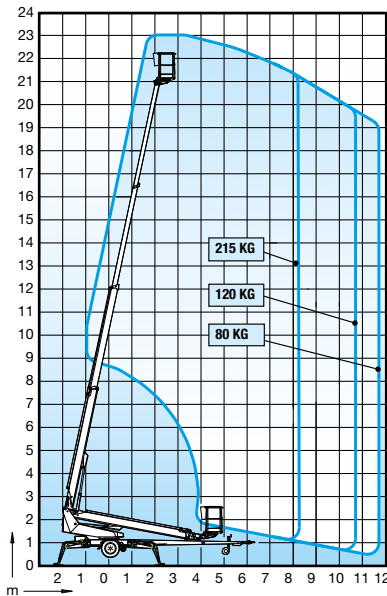

| | |
|-----------------------------|---------------|
| Max. working height | 23.00 m |
| Max. platform height | 21.00 m |
| Max. outreach | 11.70 m |
| Support width | 4.40 / 4.85 m |
| Lifting capacity | 215 kg |
| Basket size | 0.7 x 1.3 m |
| Boom rotation | cont. |
| Basket rotation | 90 ° |
| Boom control | proport. |
| Transport length | 8.15 m |
| Transport width | 2.05 m |
| Transport height | 2.24 m |
| Weight | 2960 kg |
| Driving system | std |
| AC socket in the basket x 2 | std |
| Electro motor | std |
| Generator pack | std |
| Gradeability | 25 % |



Technical specifications are subject to change without prior notice.

DINOLIFT
Up to the Job

Dinolift Oy
Raikkolantie 145 • FI-32210 LOIMAA • FINLAND
Tel. +358 (0)20 1772 400 • Fax +358 (0)2 76 27 160
www.dinolift.com