HA20 RTJ PRO

PERFORMANCE & EASE OF USE

> Best lifting speed of 48 sec.
> Industry leading working envelope with an outreach of 12.2 m
> Fully proportional and simultaneous movements
> Ease of transport

EXCELLENT ROBUSTNESS

> Rugged hoods with ergonomic handle
> Long lasting structural design

MAXIMIZED TOTAL COST OF OWNERSHIP

> Haulotte Activ'Screen (on board diagnostic)
> Haulotte Stop Emission System: automatically turns the engine off & on
> Exclusive modular basket with upper control box cover and tool tray
> Easy access to all components

BEST COMFORT AND SAFETY FEELING

> Haulotte Activ' Shield Bar 2.0

HA20 RTJ PRO

ROUGH TERRAIN ARTICULATING BOOMS

TECHNICAL DATA

	HA20 RTJ PRO
Working height	20.6 m
Platform height	18.6 m
Horizontal outreach	12.2 m
Up and over clearance	8.4 m
Lift capacity	230 kg (2 pers.)
F x G Platform size	1.83 x 0.8 m
A Length - stowed	8.8 m
B Width	2.42 m
Height - stowed	2.51 m
H Storage / transport length	6.5 m
C Storage / transport height	2.93 m
Vertical jib rotation	140° (+ 60°/ - 80°)
Platform rotation	180° (+ 90° / - 90°)
Turntable rotation	360° continuous
Tailswing	14.2 cm
D Wheelbase	2.45 m
E Ground clearance	42 cm
Tilt	5 °
Drive speed	0.5 - 5 km/h
Gradeability	45 %
Tyres - solid rough terrain	1025 x 365 mm
Turning radius - outside	3.75 m
Power source	Kubota 48.6 kW, stage 5 NRC: Kubota, 36.5kW, Stage 3A
Weight	9 600 kg

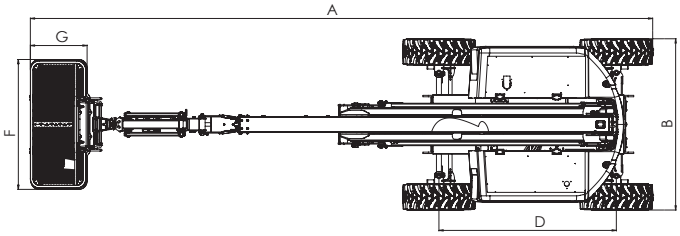

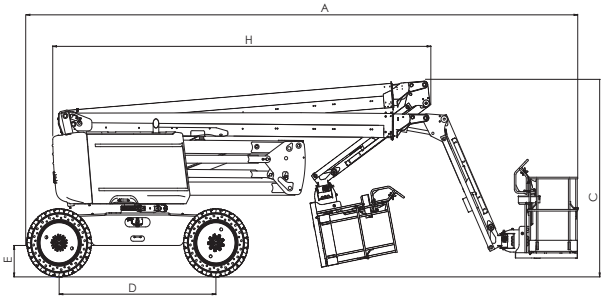

STANDARD EQUIPMENT

> Haulotte Activ'Screen
> Haulotte Activ'Shield Bar 2.0
> Haulotte Stop Emission System
> Universal telematics plug
> Rotating beacon
> Front oscillating axle increases stability on uneven ground
> 4 wheel drive, 4 wheel steer
> Permanent limited slip differential
> 4 simultaneous movements for maximum productivity
> Modular standard basket 1.83 m x 0.80 m, drop bar entry gate
> Upper control box protection cover and tool tray in plastic ultra-solid
> AC power to platform 110 / 230 V
> Travel alarm
> Electric pump system and emergency descent
> 12 V battery
> Sound and light alarm for tilt and load
> Hour meter
> Low fuel level indicator (upper & lower control boxes)
> Swing out engine tray for ease of maintenance

OPTIONS AND ACCESSORIES

> Glazier pack
> Non-marking tires
> Biodegradable hydraulic oil
> Hot weather kit: hydraulic oil cooler + hydraulic oil
> Cold weather kit : - 10°C / - 25°C
> Flashing light
> Power to platform 110 / 230 V (with or without circuit-breaker 30 mA)
> 55 W working light
> Air-line to platform 6.5 mm inner diameter
> Hydraulic generator Dynaset 3.5 Kw
> Lateral swing door entry gate
> Large modular basket 2.44 m x 0.91 m
> Spark arrestor and electric one-way valve

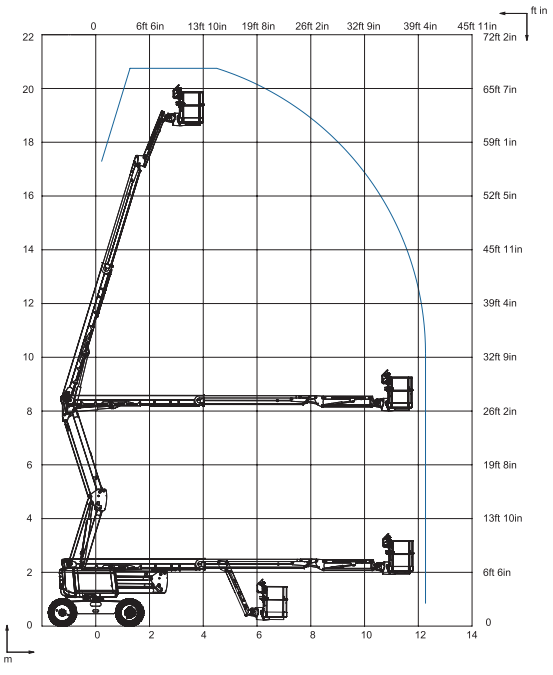

2420604230 · We reserve the right to modify the technical characteristics of this document without notice · 08/2019

La Péronnière - BP 9 - 42152 l'Horme - France · Tel: +33 (0)4 77 29 24 24 · Fax: +33 (0)4 77 29 43 95 ·
haulotte@haulotte.com · **www.haulotte.com**

Haulotte
LET'S DARE TOGETHER